




Monofacial

Bifacial

LP182*199-M-72-NH N-Type TOPCon

Rated Power 620-640W

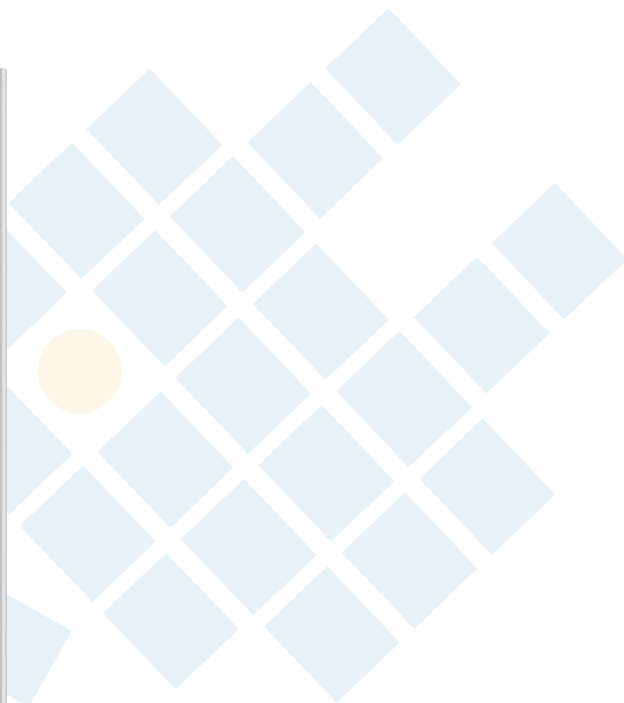

N-Type MBB Cell
New circuit design N-type cells, can increase the output power of 10W~20W



Low Light Features
Higher performance under low light environment.



Higher Output Power
Module adopts 144 pcs of 182*182mm half cells, the maximum power can reach 640W.




Load Capacity
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.



Harsh Environmental Adaptability
Strict salt spray and ammonia corrosion test by TUV Nord.



PID Protection
Ensure the attenuation probability caused by PID phenomenon is minimized.

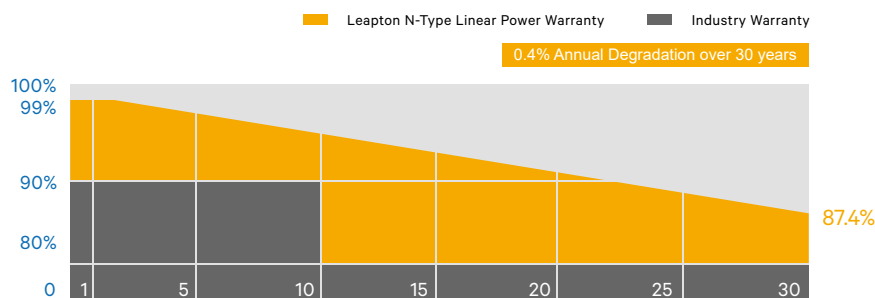

Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Leapton Solar (Changshu) Co., Ltd.

No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+81-78-382-3182


www.leaptonenergy.jp

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com

MECHANICAL DIAGRAMS

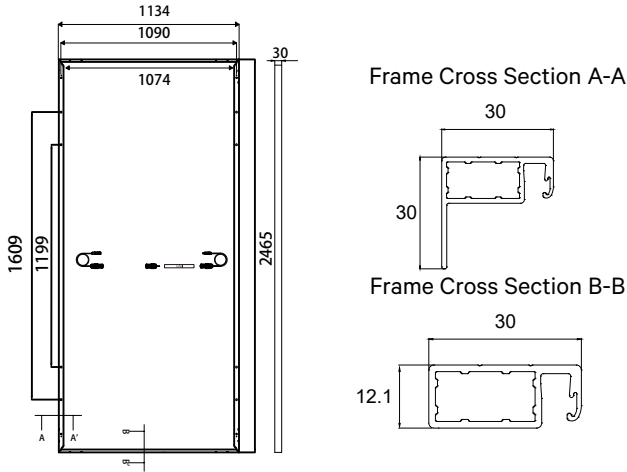

SPECIFICATIONS

Weight	28.7kg
Dimensions	2465mm*1134mm*30mm
Cell Dimensions	182*199mm
Cell Amount	72*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Front galss	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Cable	4mm ² , N 1400mm/P 1400mm for Horizontal installation 4mm ² , N 300mm/P 300mm for Vertical installation
Connector	MC4 compatible

ELECTRICAL PARAMETERS AT STC

Power	620W	625W	630W	635W	640W
Open Circuit Voltage	52.09V	52.29V	52.49V	52.69V	52.89V
Short Circuit Current	15.09A	15.15A	15.21A	15.23A	15.25A
Maximun Power Voltage	43.48V	43.68V	43.88V	44.07V	44.29V
Maximum Power Current	14.26A	14.31A	14.36A	14.41A	14.45A
Module Efficiency	22.18%	22.36%	22.54%	22.72%	22.90%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL PARAMETERS AT NMOT

Power	467W	471W	474W	478W	482W
Open Circuit Voltage	49.49V	49.69V	49.89V	50.09V	50.29V
Short Circuit Current	12.13A	12.18A	12.21A	12.23A	12.27A
Maximun Power Voltage	40.55V	40.75V	40.95V	41.14V	41.34V
Maximum Power Current	11.52A	11.56A	11.58A	11.62A	11.66A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

TEMPERATURE CHARACTERISTICS


NMOT	41±3°C	Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of VOC	-0.25%/°C	Temp Coefficient of Pmax	-0.30%/°C

PACKING CONFIGURATION


Modules/Pallet	37 Pieces	Modules/40'Container	664 Pieces
Packing Description	18 Pallets, Total=37*16+36*2=664 Pieces		

CHARACTERISTICS

LP182*199-M-72-NH-625W



LP182*199-M-72-NH-625W



MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A



Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Leapton Solar (Changshu) Co., Ltd.

No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+81-78-382-3182

www.leaptonenergy.jp

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com