



LEAPTON
SOLAR

L-TOPCon
Next-Generation TOPCon Technology

LEAP SERIES


日本発の太陽光パネルメーカー
LEAP FROM JAPAN TO THE WORLD



LP182*210-M-66Q-NB POWER RANGE 650-670W



- 1/ L-TOPCon: The Next Evolution of TOPCon**
Enhanced through Advanced Process Innovation for 30~40W Power Gain.
- 2/ Enhanced Rear-Side Generation**
Enhanced structure maximizes light use, boosting TOPCon bifacial efficiency.
- 3/ Low Light Features**
Higher performance under low light environment.
- 4/ Lower LCOE, Greater Value**
Produce More Energy and Increase Your Project Profitability.

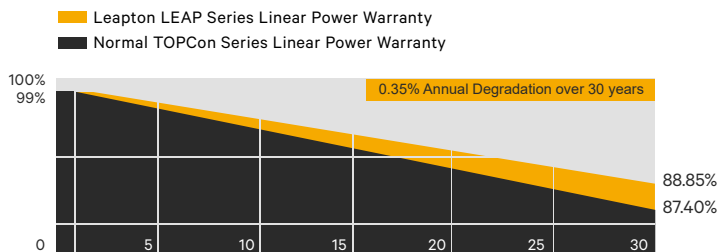

COMPREHENSIVE CERTIFICATES

IEC 61215, IEC 61730
ISO 9001: 2015 Quality management systems
ISO 14001: 2015 Environmental management systems
ISO 45001: 2018 Occupational health and safety management systems

DATASHEET VERSION: 2026 V1

Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

Manufacturer : Leapton Solar (Changshu) Co., Ltd.

No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+81-78-382-3182


www.leaptonenergy.jp

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com

MECHANICAL DIAGRAMS

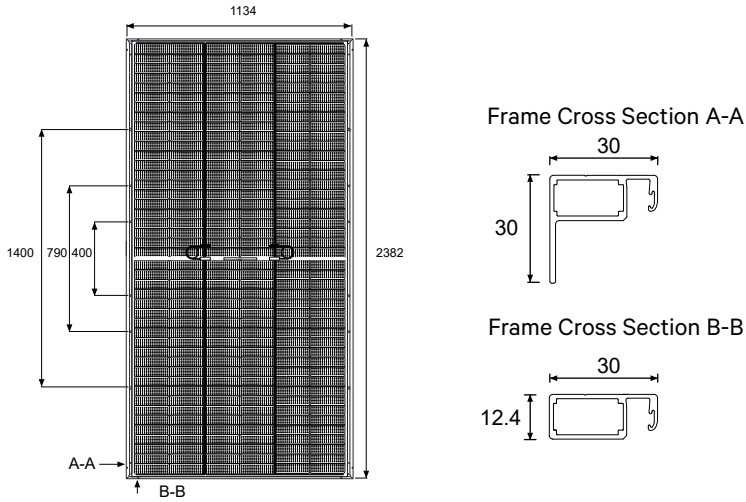

SPECIFICATIONS

Weight	32.2kg
Dimensions	2382mm*1134mm*30mm
Cell Dimensions	182*210mm
Cell Amount	66*4 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Frame	Aluminum Alloy
Cable	4mm ² , N 1400mm/P 1400mm for Horizontal installation 4mm ² , N 500mm/P 500mm for Vertical installation
Connector	MC4 compatible
Bifaciality	85±5%

ELECTRICAL PARAMETERS AT STC

Power	650W	655W	660W	665W	670W
Open Circuit Voltage	50.28V	50.46V	50.64V	50.82V	51.00V
Short Circuit Current	15.98A	16.04A	16.10A	16.15A	16.21A
Maximum Power Voltage	42.60V	42.73V	42.86V	42.99V	43.12V
Maximum Power Current	15.26A	15.33A	15.40A	15.47A	15.54A
Module Efficiency	24.06%	24.25%	24.43%	24.62%	24.80%

* STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

ELECTRICAL PARAMETERS AT NMOT

Power	494W	498W	502W	506W	510W
Open Circuit Voltage	47.77V	47.94V	48.11V	48.28V	48.45V
Short Circuit Current	13.05A	13.11A	13.17A	13.21A	13.27A
Maximum Power Voltage	40.04V	40.16V	40.29V	40.42V	40.54V
Maximum Power Current	12.34A	12.40A	12.46A	12.52A	12.58A

* NMOT: Irradiance 800W/m², Cell Temperature 20°C, AM=1.5

ELECTRICAL PARAMETERS AT BNPI

Output Power	724W	729W	735W	740W	746W
Open Circuit Voltage	50.38V	50.56V	50.74V	50.92V	51.10V
Short Circuit Current	17.81A	17.88A	17.94A	18.01A	18.08A
Maximum Power Voltage	42.69V	42.83V	42.96V	43.10V	43.22V
Maximum Power Current	16.96A	17.02A	17.11A	17.17A	17.26A


* BNPI: Front Irradiance 1000W/m², Rear Irradiance 135W/m², Cell Temperature 25°C, AM=1.5

TEMPERATURE CHARACTERISTICS

NMOT	41±3°C	Modules/Pallet	37 Pieces
Temp Coefficient of ISC	+0.046%/°C	Packing Description	20 Pallets, Total=(37+37)x10=740 Pieces
Temp Coefficient of VOC	-0.24%/°C	Modules/40'Container	740 Pieces
Temp Coefficient of Pmax	-0.26%/°C		

PACKING CONFIGURATION

CHARACTERISTICS

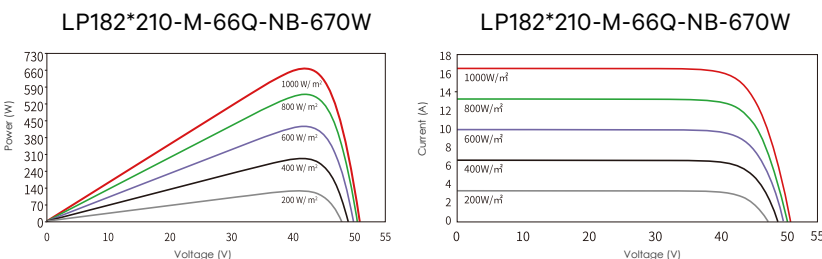

MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+70°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	30A

25 YEARS PRODUCT WARRANTY

30 YEARS POWER WARRANTY